


TECHNICAL DATA SHEET

Novatik® NATURA | SLATE

All the appearance of natural slates, combined with the strength of steel and the weather resistance of a rock chip coating, this minimalist design is an ideal choice for those seeking a more modern look. With its flat profile and neutral colour, NATURA SLATE is suitable for both vertical and pitched roofs, perfectly meeting the needs of contemporary architectural design.

Novatik NATURA SLATE tiles are produced using premium quality steel, protected with ZnMg 250 g/sqm alloy plus additional anti-corrosion protection (primer) on both sides, and covered with natural volcanic stone chips. The additional anti-corrosion protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

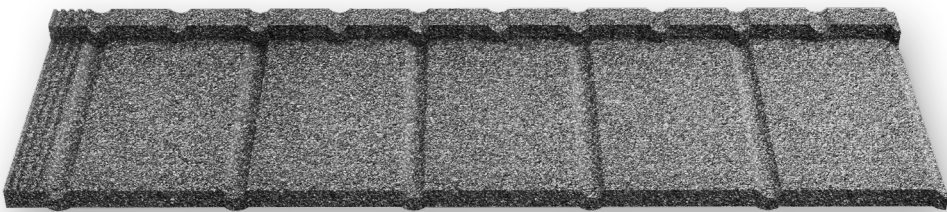

TRANSPARENT ACRYLIC COATING

TEXTURED FINISH
(VOLCANIC ROCK CHIPS)

BASE LAYER / COAT


PRIMER

PROTECTIVE LAYER ZN-MG

STEEL

PROTECTIVE LAYER ZN-MG

PRIMER

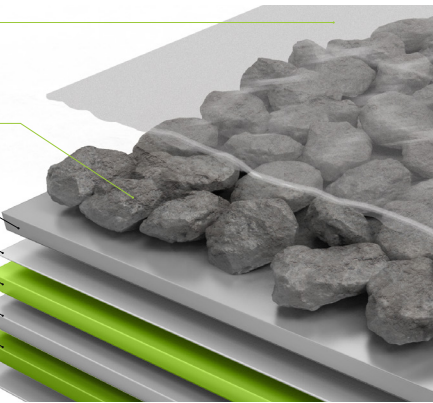

30

YEARS

AESTHETICS
WARRANTY

60

YEARS

TECHNICAL
WARRANTY


COLOURS:



DARK MOON



BROWN EARTH



SILVER MOON



GRAPHITE GREY

TECHNICAL INFORMATION

TOTAL LENGTH	1282 mm
LENGTH OF COVER	1226 mm
TOTAL WITH	412 mm
WIDTH OF COVER	370 mm
TILES / SQM	2.21 modules/sqm
ROOF PITCH	Min. 16°
WEIGHT / SQM	aprox. 6.70 kg/sqm
BATTEN SPACING	370 mm
STEEL TYPE / STEEL THICKNESS	DX51 / 0.45 mm
CORROSION RESISTANCE	Protective Layer ZnMg 250 g/sqm + Primer (additional anti-corrosion layer)
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	2.1 mm

Module dimensions: the values are defined with the accepted tolerances according to SR EN 508-1:2009.

Manufactured by: NOVATIK SRL
HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro
novatik.ro