

TECHNICAL DATA SHEET

Novatik | **METAL**


CLICK SILENT

Novatik METAL CLICK SILENT – is a simple and rewarding solution for building acoustics improvement. Standing seam roof Novatik METAL CLICK SILENT - is improved in terms of sound insulation with a self-adhesive absorbent membrane designed for metallic constructions. It reduces the noise produced by rain and offers a maximum absorption of broadband sound from an enclosure. The membrane on the Novatik METAL CLICK SILENT works as an insulation layer against the noise produced by rain.

>LAYERS

finishing MAT/HIGH COAT/FROST


1. **MAT:** Polyester Mat 40/35 µm;
HIGH COAT: Polyurethan - Polyamid 50 µm;
FROST: Polyurethan 60 µm;
(on the front side of the tile);
2. Primer;
3. Protective layer of: Zn / ZnMg;
4. Steel;
5. Protective layer of : Zn / ZnMg;
6. **MAT:** Polyester 10 µm;
HIGH COAT: Epoxid 10 µm;
FROST: Epoxid 12 µm;
(on the back side of the tile).




	Novatik METAL CLICK SILENT MAT	Novatik METAL CLICK SILENT HIGH COAT	Novatik METAL CLICK SILENT FROST
TOTAL LENGTH	1000 - 6000 mm	1000 - 6000 mm	1000 - 6000 mm
WIDTH OF COVER	588 mm	588 mm	588 mm
ROOF PITCH	Min. 8° *	Min. 8° *	Min. 8° *
THICKNESS (STEEL + ORGANIC COATINGS)	0,50/0,60 mm	0,51 mm	0,50 mm
LOOK	MAT	GLOSSY	CRYSTALLIZED
SURFACE COATING	Polyester Mat 40/35 microns , on the front side of the tile	Polyurethan/Polyamid 50 microns , on the front side of the tile	Polyurethan 60 microns on the front side of the tile
PROTECTION LAYER	Lack polyester 10 microns , on the back side of the tile	Lack Epoxid 10 microns , on the back side of the tile	Lack Epoxid 12 microns , on the back side of the tile
RAW MATERIAL	Steel with protective coating of Zn 275 g/sqm /ZnMg 120g/sqm	Steel with protective coating of Zn 275 g/sqm	Steel with protective coating of Zn 275 g/sqm
UV RESISTANCE	RUV 4	RUV 4	RUV 4
CORROSION RESISTANCE	RC 3	RC 4	RC 4
FALTZ HEIGHT	25,4 mm	25,4 mm	25,4 mm

Panel dimensions: the values are defined with the acceptable tolerances according to SR EN 508-1:2009.

* For a roof pitch between 8° and 12°, the distance between the ridge and the eaves must be maximum 6 m long, without breakthroughs and without vertical overlaps.



Novatik
METAL | CLICK SILENT MAT

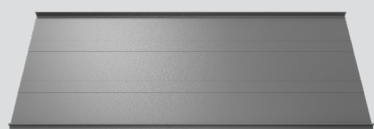

0.5 mm

0.6 mm

20 **30**


YEARS
AESTHETIC WARRANTY

20 **40**

YEARS
AESTHETIC WARRANTY

* subject to availability

Novatik
METAL | CLICK SILENT HIGH COAT

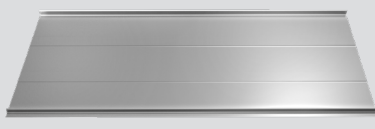

20 **40**

YEARS
AESTHETIC WARRANTY

YEARS
TECHNICAL WARRANTY

Novatik
METAL | CLICK SILENT FROST




20 **40**

YEARS
AESTHETIC WARRANTY

YEARS
TECHNICAL WARRANTY

COLOURS 0,5 mm

COLOURS 0,6 mm



COLOURS



COLOURS



Manufactured by: NOVATIK SRL

HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro, novatik.ro
Novatik METAL CLICK SILENT Technical Data Sheet – ENG_V3 | March 2025