

Novatik®

"A ROOF FOR NINE LIVES, GUARANTEED BY THE EXPERTS!"

WWW.NOVATIK.RO

ABOUT NOVATIK

Novatik®

>ABOUT US

NOVATIK SRL is the developer and manufacturer of Novatik METAL roofing systems (interlocking steel roof systems, Colofer® cover), Novatik NATURA interlocking steel roof systems, stone chip coated panels), Novatik CLICK (standing seam roofs) and rainwater systems Novatik RONDA and QUADRA. Novatik SRL is also the exclusive representative in Romania of DELTA roof protection membranes (anti-condensation membrane, vapour barriers).

>MISSION

Our mission is to provide innovative, efficient, long lasting and aesthetically pleasing roofing products, together with the highest customer satisfaction. We aim to work closely with our customers, resolve problems and build trust and total confidence in our company and our products.

>VALUES

- Committed to maintaining quality & standards;
- Ethical business practices;
- Open to innovation & product development;
- Forward thinking;
- Trend setters.

>COMPANY STRENGTHS

- Well established company that inspires customer confidence;
- Over 15 years of experience of the premium roofing market in Romania;
- Proven successful supplier of high-quality, often very innovative, roofing products;
- Excellent relations with partners, both suppliers and distributors.

Manufactured by:
NOVATIK SRL

HEAD QUARTERS:
9 Mai street, no. 75, 105 200 Băicoi,
Prahova, România
Tel: +40 244 260 140;
Fax: +40 244 260 145
office@novatik.ro
novatik.ro



2019

In August, Final Distribution changes its name to NOVATIK S.R.L. as part of our marketing and rebranding strategy. This decision coincides with our 15th anniversary of activity in the roofing market in Romania and 8 years since launching our own brand, NOVATIK. We decide this is the moment to begin a new chapter in our company` s history, with the aim of making NOVATIK the strongest brand on the premium roofing market in Romania.

15 years of experience in creating a market and developing a demand for modular, stone chip coated roofing has given us the confidence and knowledge needed to develop and manufacture our own product. In September the company launches Novatik NATURA – our new, stone chip coated, metal roof tiles.

2018

In January, NOVATIK becomes the sponsor of the women's handball team, CSM Bucharest. Performance is the word that best defines CSM Bucharest, the partnership evolving as a natural result of common synergies and values. Determination and ability propelled Final Distribution into the coated, pressed metal roofing business and these attributes enable it to maintain its position as a top performer in this industry.

2017

In February, the company launches Novatik SLATE, a new profile combining the special look of natural slate, but utilising robust, modern and lightweight construction materials. At the end of May, Final Distribution launches another new profile, Novatik WOOD, which preserves the natural beauty of a shingle roof, combined with all the advantages of a metal roof (increased corrosion resistance, strong, durable and lightweight).

2016

Novatik CLICK, the standing seam roof system, launches in March - a popular modern profile that quickly reaches the top of the local sales market. The standing seam roof has a wide area of application, very well suited to modern and contemporary architecturural design, especially in Western Europe.

2014

In April, Final Distribution launches a new product, Novatik AVANGARDE, the first post painted, metal tile manufactured in Romania.

2013

In September 2013, the company is awarded "The best exporter of building materials of 2013" by the Business Construct Gala.

2012

In June, a second line opens, beginning the production of Novatik tiles, the first pressed metal tiles in small panels to be manufactured in Romania. In the second half of 2012, first exports begin to Slovenia, France and Spain. The Novatik brand sells not only in Romania, but also in an increasing number of new territories. In September 2012, Final Distribution obtains ISO 9001 Quality Management System certification, thus proving our commitment to quality, to customer satisfaction, and to continuously improving our business.

2011

In February, the first production line opens in Băicoi-Prahova. Final Distribution enters the production field with its own brand of gutters and downpipes - NOVATIK.

2010

In the second half of the year, the company launches the NOVATIK brand and invests in high performance equipment for the production of gutters and downpipes.

2006

Final Distribution becomes the sole distributor of GERARD stone chip coated metal roof tiles and DELTA roof membranes in Romania.

2004

The company, Final Distribution, is established.

Novatik
METAL | CLASSIC

THE ROOF FOR THE MOST DEMANDING CUSTOMERS



>DISTINCT PROFILE

Novatik metal roof tiles have been designed to give the aesthetic appearance of ceramic tiles, but with an original profile.
Advantages of tile's design and dimensions:
- Easy handling;
- Reduced storage space;
- Reduced transport costs due to low weight;
- Where access is difficult, smaller vehicles can be used;
- Easier installation and less breakages, especially on complex roofs.

Novatik METAL CLASSIC is available in two versions:
Novatik METAL CLASSIC Mat - 15 years warranty for aesthetics and 30 years technical warranty.
Novatik METAL CLASSIC High Coat - 25 years warranty for aesthetics and 40 years technical warranty.

>LOW WEIGHT

The optimal design of the tiles and their low weight, compared to traditional roofing materials, provide a great opportunity in the design stage to make substantial savings, by reducing the weight and dimensions of the roof substructure, without compromising the structural integrity of the roof.

>STRONG & SECURE FASTENING SYSTEM


The tiles are fastened with nails or screws to the roof battens requiring no further components. The tiles are overlapped to create a perfect interlocked system, which is completely secure and waterproof. Novatik roofing system is one of the most secure and durable systems available.

>EASY INSTALLATION

The tiles can be overlapped in both directions (from left to right or from right to left), thus reducing installation time and costs.

>LAYERS

1. Polyester Mat 35 µm / Polyurethan/ Polyamid 50 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm / Epoxid 10 µm.

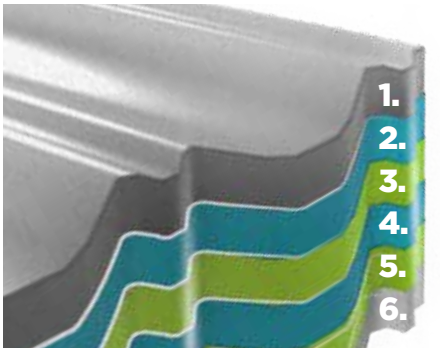

AUSTRIAN STEEL FROM:
voestalpine


Novatik METAL | CLASSIC MAT



15 YEARS AESTHETICS WARRANTY

30 YEARS TECHNICAL WARRANTY

Novatik METAL | CLASSIC HIGH COAT

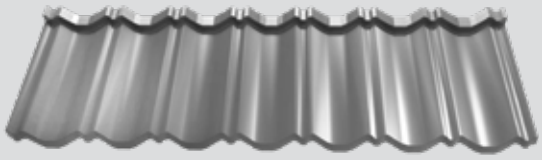

25 YEARS AESTHETICS WARRANTY

40 YEARS TECHNICAL WARRANTY

Novatik
METAL | CLASSIC DUO

TWO TIMES MORE FRIENDLY
WITH THE ROOF INSTALLERS



>BIMODULAR DESIGN

The bimodular design and symmetry of Novatik METAL CLASSIC DUO makes it one of the most effective types of metal roofing, which ensures easy and quick installation, minimizing technological losses. Based on elegance and refinement, classic remains a universal and timeless style, adaptable to any project. Although Novatik METAL CLASSIC DUO keeps all the style characteristics, it also enjoys the modern roofing technology, offering to users, besides a perfectly harmonized appearance, safety through durability.

>FASTENING SYSTEM


Novatik METAL CLASSIC DUO is the product that meets the needs of the roofers to have a classic installation system on top of the battens, using screws with rubber gasket for fastening. The design of the accessories has been chosen in such a way that the bending is no longer required, the roof system incorporating a complete range of sealing and ventilation accessories.

>ADVANTAGES

- The most economical Novatik roofing solution, up to 20% fewer technological losses during installation compared to other types of metal roofing tiles, produced in big panels;
- Novatik METAL CLASSIC DUO's design and modern technology translates into their perfect symmetry, making them easy to bond and providing safe overlapping against any accidental infiltration;
- The reduced weight and the optimal design of Novatik METAL CLASSIC DUO metal panels guarantees the roof's safety and its good functionality;
- Increased safety in the event of an earthquake or fire;
- Easy and fast installation;
- It does not require special maintenance.


>LAYERS

1. Polyester Mat 35 µm / Polyurethan/ Polyamid 50 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm / Epoxid 10 µm.

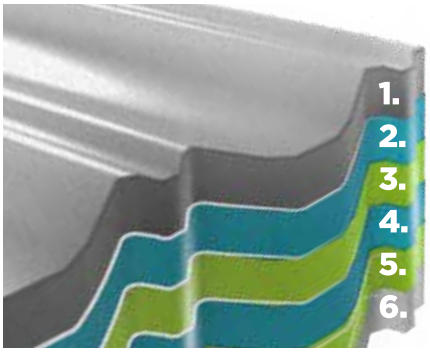


AUSTRIAN STEEL FROM:
voestalpine

Novatik METAL | CLASSIC DUO MAT

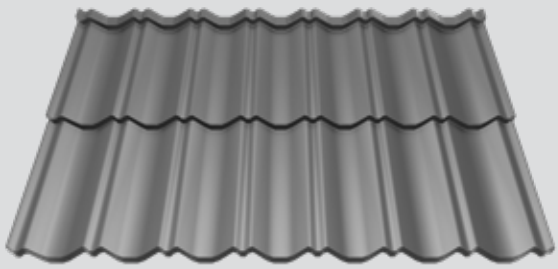

15	30
YEARS	YEARS
AESTHETICS WARRANTY	TECHNICAL WARRANTY


Novatik METAL | CLASSIC DUO HIGH COAT

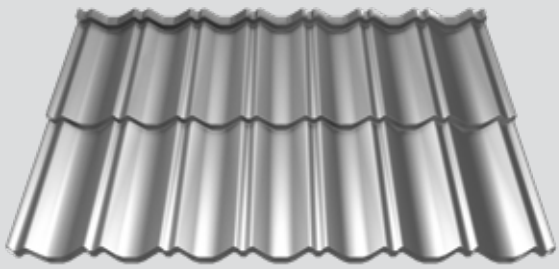

25	40
YEARS	YEARS
AESTHETICS WARRANTY	TECHNICAL WARRANTY

Novatik
METAL | WOOD

A ROOF WHICH TAKES CARE OF ITSELF!

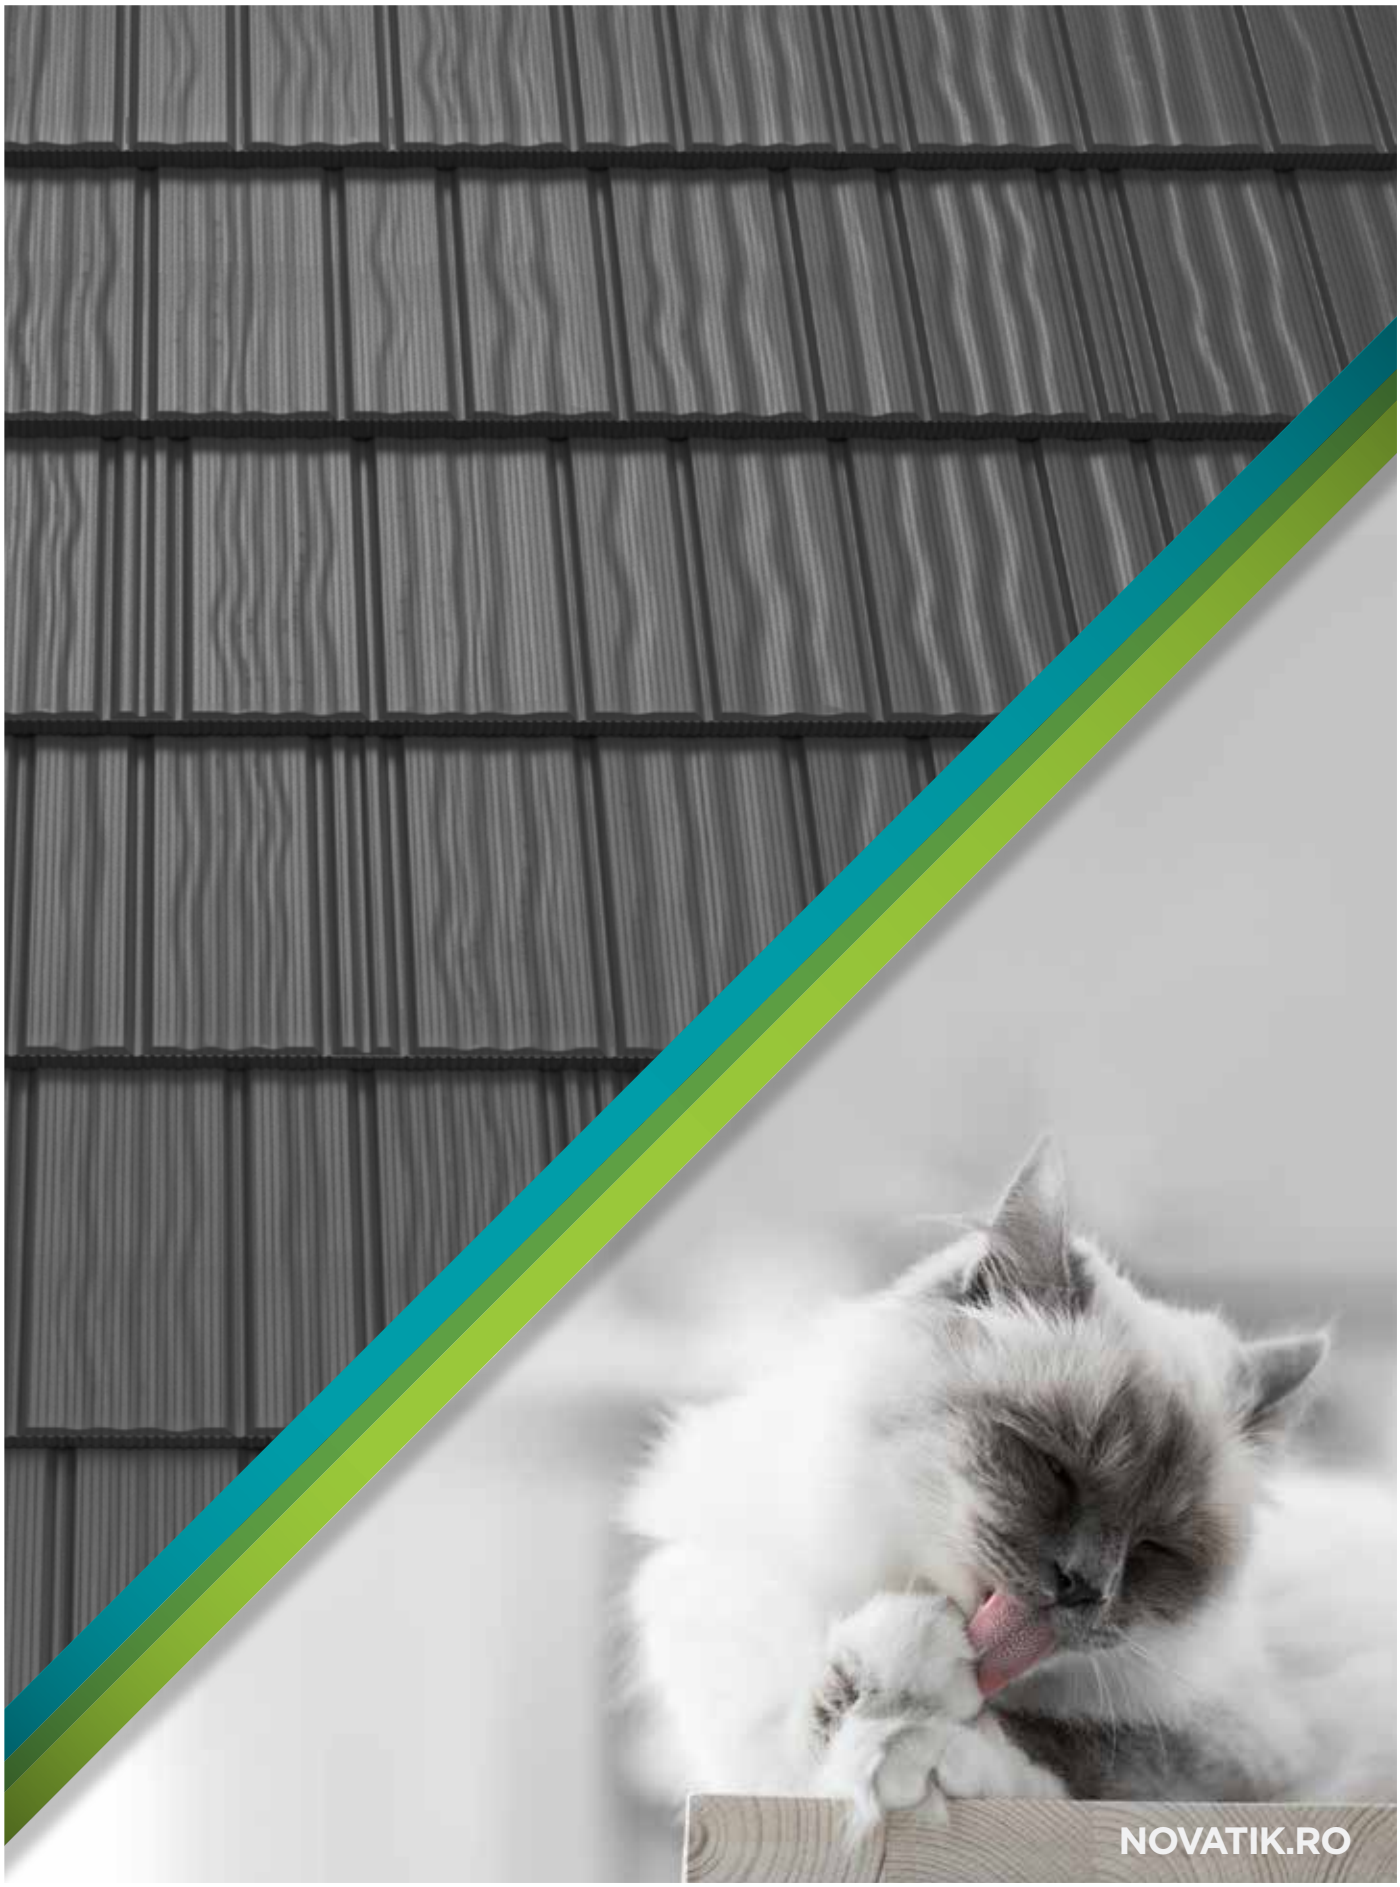

>TRADITIONAL BEAUTY

The natural beauty of a wood shingle roof is completely recreated with our newest profile - Novatik METAL WOOD - while keeping all the advantages of metal tiles (lightweight, high corrosion protection, lasting strength and durability). Unlike traditional wooden shingles, which require maintenance or replacements, Novatik METAL WOOD shingles need very low maintenance.

>MODERN TECHNOLOGY

The protection provided by the ZnMg coating ensures a high corrosion resistance and better performance in different extreme weather conditions, compared to galvanized steel. Providing installation according to our specifications, we offer 15 years aesthetic warranty and 30 years technical warranty.


Each Novatik METAL WOOD tile is made using modern metal pressing technology resulting a deep wood grain impression, which makes the shingle look so unique. The tiles are fixed with nails or screws with a minimum density of 8 units/sqm.

>ADVANTAGES

- Aesthetic appearance of wooden shingles;
- Great finishing;
- Fast and secure installation;
- Durable and lightweight system;
- Low maintenance;
- 100% recyclable;
- The symmetry of the tiles allows installation from both directions (from left to right or right to left), providing invisible overlapping;
- High resistance to impact, to high speed winds or powerful storms and snow loadings.


>LAYERS

1. Polyester Mat 35 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm.

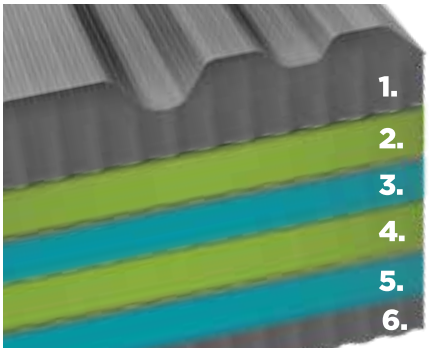

AUSTRIAN STEEL FROM:
voestalpine

Novatik
METAL | WOOD MAT

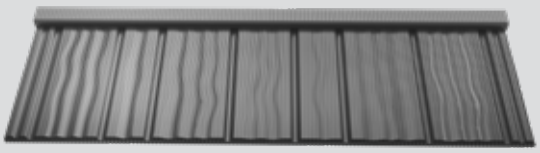

15
YEARS
AESTHETICS WARRANTY

30
YEARS
TECHNICAL WARRANTY



Novatik
METAL | SLATE

MINIMAL, ROBUST AND
WITH PERSONALITY!



>SPECIAL PROFILE

Novatik METAL SLATE profile was created to combine natural slate look with the advantages of modern materials. With Novatik METAL SLATE you will have a roof with a simple design, functional aesthetics, minimalist and without unnecessary architectural elements. Strong linear elements and bold horizontal lines make Novatik METAL SLATE roof the ideal choice for all types of constructions and renovations. Smooth surfaces and reduced height of the profile are very suitable for roofs with complex geometry and at least 16^0 pitch.

>MODERN TECHNOLOGY


The modern technology for manufacturing the tiles offers Novatik METAL SLATE a great finish, achieving perfect interlocking of modules during installation, thus reducing the risk of leakage and making it one of the most secure roofing systems on the market. The tiles are fixed with nails or screws with a minimum density of 8 units/sqm.

>ADVANTAGES

- Reduced technological losses for roofs with a complex architecture;
- Flawless finish;
- Natural Slate look;
- Durable, lightweight system for easy, quick and safe installation;
- High resistance to fire, to extreme high winds and heavy snow loadings;
- The unique horizontal fixing system provides extra security against leakage and ensures that each tile remains in place in extreme high winds conditions;
- Low maintenance;
- 100% recyclable.

>LAYERS

1. Polyester Mat 35 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm.

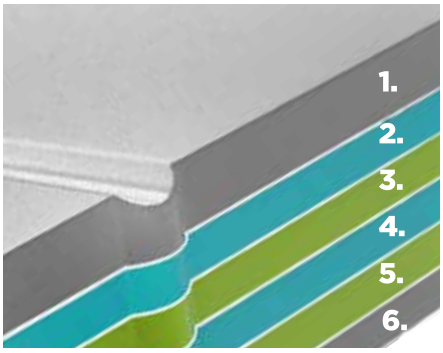

AUSTRIAN STEEL FROM:
voestalpine

Novatik
METAL | SLATE MAT



15 YEARS
AESTHETICS WARRANTY

30 YEARS
TECHNICAL WARRANTY



Novatik
METAL | CLICK

FOR PURRRRRRFECT LINES



>STANDING SEAM DESIGN

Novatik METAL CLICK system is considered to be the closest option to the traditional metal roof. That is why Novatik METAL CLICK is the best solution both for reroofing or ultra-modern architectures. The shape, the dimensions and the falz assure a lower cost, without compromising the technical performances necessary for a high quality roofing system.

>INSTALLATION

Standing seam roof Novatik METAL CLICK:
- fixed with screws.


Standing seam roof Novatik METAL CLICK S:
- fixed with stainless steel clams, an option with an improved dilatation behavior.

>ADVANTAGES

- Flawless flat look;
- Higher resistance to corrosion;
- Fixing system with both screws and stainless steel clams;
- The system is recommended for minimum 8° slopes;
- Easy to install;
- 100% recyclable.


>LAYERS

1. Polyester Mat 35 µm / Polyurethan/ Polyamid 50 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm / Epoxid 10 µm.

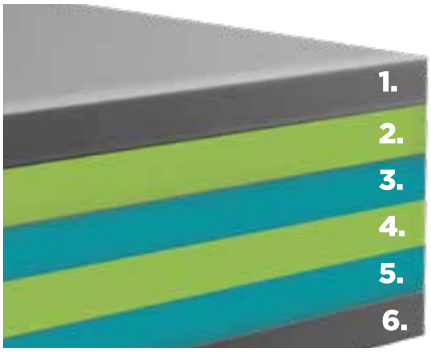


AUSTRIAN STEEL FROM:
voestalpine

	WIDTH OF COVER (MM)	TOTAL LENGTH (MM)	FALTZ HEIGHT (MM)
Click 356	356	389	25.4
Click 500	500	533	25.4
Click 588	588	621	25.4



NOVATIK METAL CLICK

	WIDTH OF COVER (MM)	TOTAL LENGTH (MM)	FALTZ HEIGHT (MM)
Click S 386	386	393	25.4
Click S 530	530	537	25.4



NOVATIK METAL CLICK S

Novatik METAL | CLICK MAT
CLICK S MAT



15 YEARS — AESTHETICS WARRANTY

30 YEARS — TECHNICAL WARRANTY

Novatik METAL | CLICK HIGH COAT
CLICK S HIGH COAT



25 YEARS — AESTHETICS WARRANTY

40 YEARS — TECHNICAL WARRANTY

Novatik
METAL | CLICK SILENT

SOUNDLESS RAIN



>STANDING SEAM DESIGN

Novatik METAL CLICK SILENT is a simple and rewarding solution for building acoustics improvement. Standing seem roof Novatik METAL CLICK SILENT - is improved in terms of sound insulation with a self-adhesive absorbent membrane designed for metallic constructions. It reduces the noise produced by rain and offers a maximum absorption of broadband sound from an enclosure. The membrane on the Novatik METAL CLICK SILENT works as an insulation layer against the noise produced by rain.

>ADVANTAGES

- Non-insulated metal roofs are usually exposed to a big difference in temperature between the inside and outside of the enclosure, which causes condensation. The soundproofing membrane also serves as an absorbent medium that prevents water from dripping as a consequence of the condensation process;
- The membrane doesn't contain any chemical additives. Therefore, it provides a complete and safe environment;
- Compared to other alternatives, Novatik METAL CLICK SILENT represents a simple and economical solution for improving the buildings acoustic;
- The soundproofing membrane resists bacteria and is easy to maintain;
- Novatik METAL CLICK SILENT represents a long term solution for metal roofs. It is durable and doesn't require special maintenance.

>INSTALLATION


- Fixed with screws;
- The system is recommended for a roof pitch of minumim 8°.

>TECHNICAL INFORMATION


- Minimum length: 1000 mm;
- Maximum length: 6000 mm;
- Width of cover: 588 mm.

>LAYERS


1. Polyester Mat 35 µm / Polyurethan/ Polyamid 50 µm;
2. primer;
3. layer of ZnMg / Zn;
4. steel;
5. layer of ZnMg / Zn;
6. Polyester 10 µm / Epoxid 10 µm.

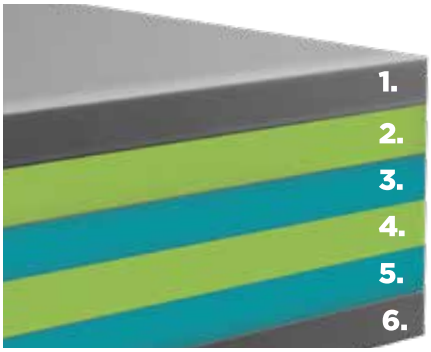

AUSTRIAN STEEL FROM:
voestalpine

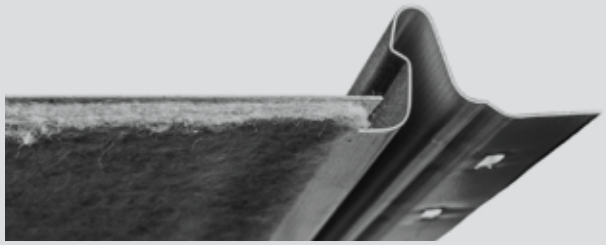


PHONO-ABSORBENT MEMBRANE



NOVATIK METAL CLICK SILENT


Novatik METAL | CLICK SILENT MAT

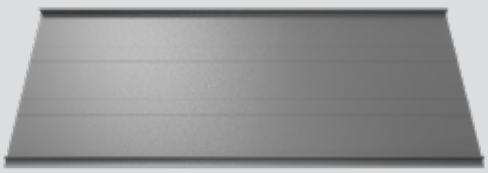

15 YEARS AESTHETICS WARRANTY

30 YEARS TECHNICAL WARRANTY

Novatik METAL | CLICK SILENT HIGH COAT

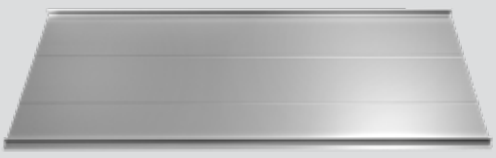

25 YEARS AESTHETICS WARRANTY

40 YEARS TECHNICAL WARRANTY

Novatik

RONDA

HALF - ROUND RAINWATER SYSTEM

20
YEARS
WARRANTY



>ADVANTAGES

-Excellent sealing;
-Adaptable for any roof;
-Light weight and easy installation;
-Superb visual appearance;
-Dimensions of the rainwater systems: 125/87 mm and 150/100 mm;
-Corrosion resistance.

AUSTRIAN STEEL FROM: voestalpine

>COMPONENTS


1. Gutter
Standard lengths: 2 m, 3 m, 4 m
Diameters: 125 mm, 150 mm
2. Gutter joint
Steel with zinc protection of 275 g/m²
3. Hidden bracket
Steel with zinc protection of 275 g/m²
4. Bracket short tail (applied)
Steel with zinc protection of 275 g/m²
5. Bracket long tail
Steel with zinc protection of 275 g/m²
6. Universal gutter end cap
Steel with zinc protection of 275 g/m²
7. Miter outer
Steel with zinc protection of 275 g/m²
8. Miter inner
Steel with zinc protection of 275 g/m²
9. Funnel pipe
Steel with zinc protection of 275 g/m²
10. Large funnel
Steel with zinc protection of 275 g/m²
11. Pipe bend for down pipe
Steel with zinc protection of 275 g/m²
12. Bend middle pipe with wrinkles 0.8 m
Steel with zinc protection of 275 g/m²
13. Down pipe
Standard lengths: 2,5 m, 4 m
Diameters: 87 mm, 100 mm
14. Down pipe support 2 pieces
Steel 2 mm / 0.5 mm, zinc 275 g/m²
15. End pipe
Steel with zinc protection of 275 g/m²
16. Y - pipe
Steel with zinc protection of 275 g/m²

Novatik

QUADRA

RECTANGULAR RAINWATER SYSTEM

20
YEARS
WARRANTY

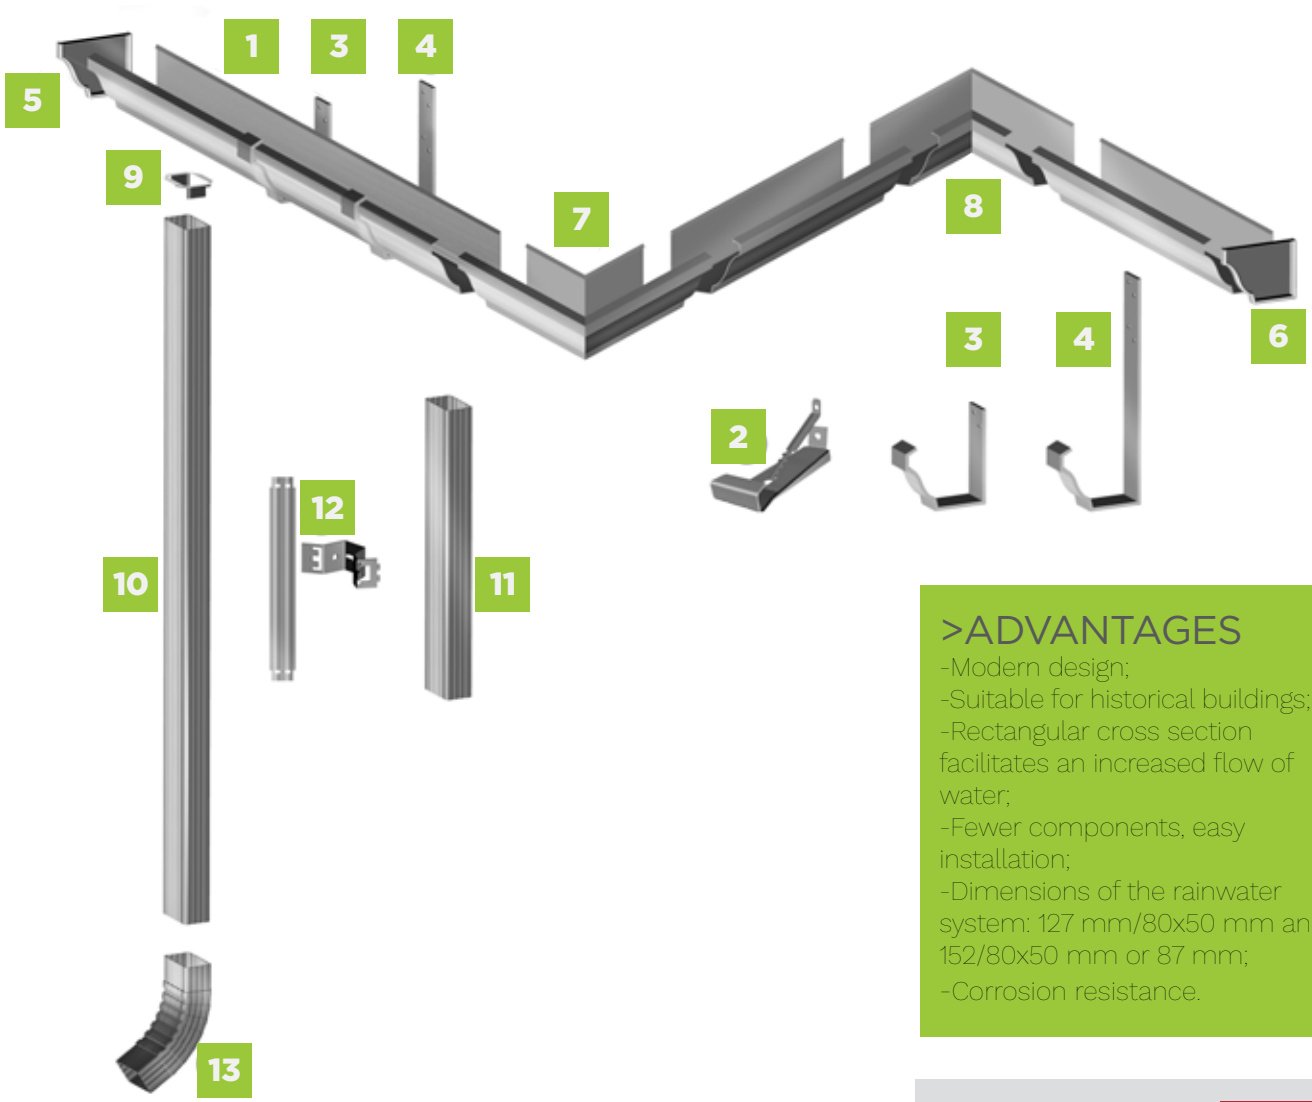

>ADVANTAGES

-Modern design;
-Suitable for historical buildings;
-Rectangular cross section facilitates an increased flow of water;
-Fewer components, easy installation;
-Dimensions of the rainwater system: 127 mm/80x50 mm and 152/80x50 mm or 87 mm;
-Corrosion resistance.

AUSTRIAN STEEL FROM:
voestalpine


>COMPONENTS

1. Gutter
Standard lengths: 2 m, 3 m, 4 m
Diameters: 125 mm, 150mm
2. Hidden bracket
Steel with zinc protection of 275 g/m²
3. Bracket short tail
Steel with zinc protection of 275 g/m²
4. Bracket long tail
Steel with zinc protection of 275 g/m²
5. Gutter end cap left
Steel with zinc protection of 275 g/m²
6. Gutter end cap right
Steel with zinc protection of 275 g/m²
7. Miter outer
Steel with zinc protection of 275 g/m²
8. Miter inner
Steel with zinc protection of 275 g/m²
9. Funnel pipe
Steel with zinc protection of 275 g/m²
10. Down pipe
Standard lengths: 2.5 m, 4 m
Cross section: 80 mm x 50 mm
11. Middle down pipe 0,8 m
Steel with zinc protection of 275 g/m²
12. Down pipe support 2 pieces
Steel 2 mm / 0.5 mm, zinc 275 g/m²
13.End pipe / pipe bend
Steel with zinc protection of 275 g/m²

COLORS AND ACCESSORIES

Novatik METAL


CLASSIC MAT
CLASSIC **DUO** MAT



BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017	BROWN RAL 8019	BRICK RAL 8004	RED RAL 3009

Novatik METAL

CLASSIC HIGH COAT
CLASSIC **DUO** HIGH COAT



BLACK RAL 9005	GREY RAL 7016

Novatik METAL

WOOD MAT



BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017	BROWN RAL 8019

Novatik METAL

SLATE MAT



BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017	BROWN RAL 8019	BRICK RAL 8004	RED RAL 3009

Novatik METAL

CLICK + CLICK S MAT
CLICK **SILENT** MAT



BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017	BROWN RAL 8019	BRICK RAL 8004	RED RAL 3009


Novatik METAL

CLICK + CLICK S HIGH COAT
CLICK **SILENT** HIGH COAT




BLACK RAL 9005	GREY RAL 7016

Novatik QUADRA

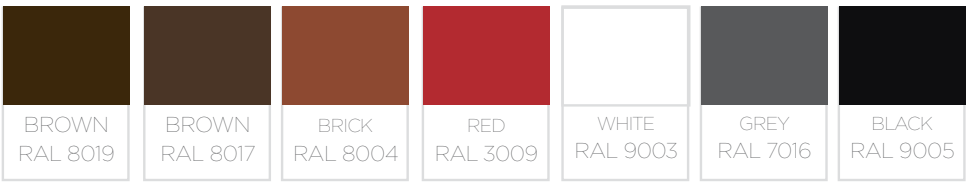

Novatik RONDA

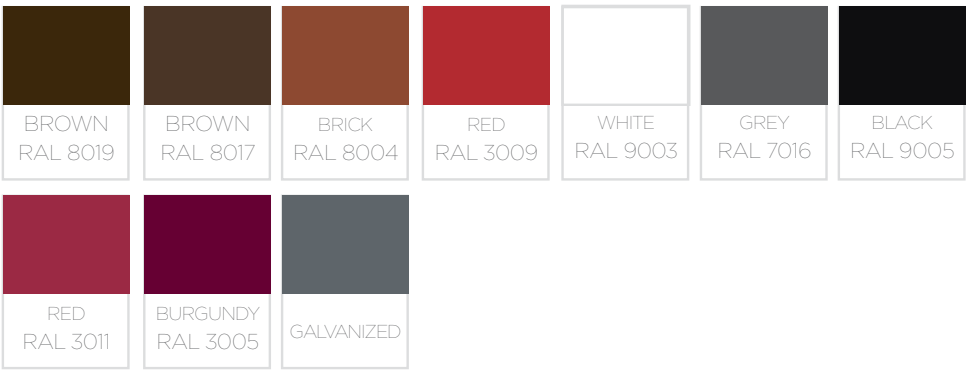


* Printed colours may differ from actual colors.

ACCESSORIES


Novatik® METAL

1
CLASSIC
SLATE
WOOD




RECTANGULAR RIDGE

2
CLASSIC
SLATE
WOOD




BARREL TRIM

3
CLASSIC DUO

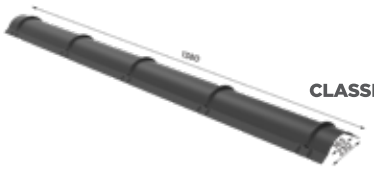


BARREL TRIM TYPE 2

4
CLASSIC
SLATE
WOOD




BOX BARGE

5
CLASSIC DUO




BOX BARGE TYPE 2

6
CLASSIC DUO




SPECIAL BOX BARGE

7
CLASSIC
SLATE
WOOD




SIDE FLASHING

8
CLASSIC DUO




SIDE FLASHING TYPE 2

9
CLASSIC DUO



HORRIZONTAL WALL FLASHING

10
CLASSIC
SLATE
WOOD




VALLEY

11
CLASSIC DUO




DUO VALLEY

12
CLASSIC
CLASSIC DUO
SLATE
WOOD




EAVES FLASHING

13
CLASSIC
CLASSIC DUO
SLATE
WOOD




ANTI-CODENSATION FLASHING

14
CLICK SILENT
CLICK
CLICK S




ANGULAR RIDGE

15
CLICK SILENT
CLICK
CLICK S




REINFORCED RIDGE

16
CLICK SILENT
CLICK
CLICK S



HALF RIDGE

17
CLICK SILENT
CLICK
CLICK S




PERFORATED RIDGE PROFILE

18
CLICK SILENT
CLICK
CLICK S




BOX BARGE

19
CLICK SILENT
CLICK
CLICK S




FASCIA BOARD

20
CLICK SILENT
CLICK
CLICK S



SIDE WALL FLASHING

21
CLICK SILENT
CLICK
CLICK S




HORIZONTAL WALL FLASHING

22
CLICK SILENT
CLICK
CLICK S




OVERLAPPING ELEMENT

23
CLICK SILENT
CLICK
CLICK S



VALLEY


24
CLICK SILENT
CLICK
CLICK S



EAVES FLASHING

25


CLICK SILENT
CLICK
CLICK S



FLASHING FOR CONCAVE PITCH

26

CLICK SILENT
CLICK
CLICK S



FLASHING FOR CONVEX PITCH

27

ALL PROFILES



VENTILATION CHIMNEY

28 **CLICK/CLICK S**



FAȚA INFERIOARĂ A PANOULUI NOVATIK CLICK

ACOUSTICS BAND

29 **CLASSIC/CLASSIC DUO/SLATE/WOOD**



SNOW GUARDS

30 **ALL PROFILES**



SNOW STOPPERS SIGMA PROFILE

31 **ALL PROFILES**



NAIL SEALING TAPE

32 **ALL PROFILES**



ROOFING MEMBRANE 115, 140, 160

33 **ALL PROFILES**



RIDGE VENTILATION ROL

34 **ALL PROFILES**



PODEST

35 **ALL PROFILES**



STEP

36 **ALL PROFILES**



EAVES CLOSING COMB

37 **ALL PROFILES**



LADDER

38 **ALL PROFILES**



SNOW STOPPERS

39 **CLICK SILENT/CLICK/CLICK S**



DRAINAGE MAT

40 **ALL PROFILES**



PERFORATED MESH TO PREVENT THE ENTRY OF BIRDS AND INSECTS

41 **CLASSIC/CLASSIC DUO/SLATE/WOOD**



VENT / SANITARY VENT

42 **CLICK SILENT/CLICK/CLICK S**






STAINLESS STEEL CLAMS

Novatik offers a complete range of roofing accessories. Installing accessories correctly, ensures the roof is weatherproof and properly ventilated, as well as being visually appealing.

AUSTRIAN STEEL FROM:
voestalpine

TECHNICAL DATA

	Novatik CLASSIC MAT 	Novatik CLASSIC HIGH COAT 	Novatik CLASSIC **DUO** MAT 	Novatik CLASSIC **DUO** HIGH COAT 
TOTAL LENGTH	1 340 mm	1 340 mm	1 340 mm	1 340 mm
LENGTH OF COVER	1 260 mm	1 260 mm	1 260mm	1 260 mm
WIDTH OF COVER	370 mm	370 mm	740 mm	740 mm
TILES/SQM	2,15 modules	2,15 modules	1.07 modules	1.07 modules
ROOF PITCH	Min 12°	Min 12°	Min 12°	Min 12°
THICKNESS (STEEL + ORGANIC COATINGS)	0,50 mm	0,51 mm	0,50 mm	0,51 mm
WEIGHT / SQM	4,74 kg/sqm	4,96 kg/sqm	4,74 kg/sqm	4,96 kg/sqm
LOOK	MAT	GLOSSY	MAT	GLOSSY
SURFACE COATING	Polyester Mat **35 microns**	Polyurethan/Polyamid **50 microns**	Polyester Mat **35 microns**	Polyester Mat **50 microns**
PROTECTION LAYER	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile
RAW MATERIAL	Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **Zn 275 g/sqm /ZnMg 120 g/sqm**	Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **ZnMg 275g/sqm /Zn 120 g/sqm**
AESTHETIC WARRANTY	15 years	25 years	15 years	25 years
TECHNICAL WARRANTY	30 years	40 years	30 years	40 years
FALZ HEIGHT				

Novatik WOOD MAT	Novatik SLATE MAT	Novatik CLICK / CLICK SILENT MAT	Novatik CLICK / CLICK SILENT HIGH COAT	Novatik CLICK S MAT	Novatik CLICK S HIGH COAT
					
1 375 mm	1 320 mm	1 000 mm- 6 000 mm	1 000 mm- 6 000 mm	1 000 mm- 6 000 mm	1 000 mm- 6 000 mm
1 295 mm	1 244 mm	-	-	-	-
370 mm	370 mm	Click : 588 / 500 / 356 mm Click Silent: 588 mm	Click : 588 / 500 / 356 mm Click Silent: 588 mm	530/ 386 mm	530/ 386 mm
2,09 modules	2,17 modules				
Min 16°	Min 16°	Min 8° *	Min 8° *	Min 8° **	Min 8° **
0,50 mm	0,50 mm	0,50 mm	0.51 mm	0,50 mm	0.51 mm
4,76 kg/sqm	4,61 kg/sqm	-	-	-	-
MAT	MAT	MAT	GLOSSY	MAT	GLOSSY
Polyester Mat **35 microns**	Polyester Mat **35 microns**	Polyester Mat **35 microns**	Polyurethan/Polyamid **50 microns**	Polyester Mat **35 microns**	Polyurethan/Polyamid **50 microns**
Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile	Lack polyester of **10 microns** on the back side of the tile
Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **Zn 275 g/sqm /ZnMg 120 g/sqm**	Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**	Steel with protective coating of **Zn 275 g/sqm /ZnMg 120 g/sqm**
15 years	15 years	15 years	25 years	15 years	25 years
30 years	30 years	30 years	40 years	30 years	40 years
		25,4 MM	25,4 MM	25,4 MM	25,4 MM

*Novatik METAL CLICK: For a roof pitch between 8° and 12°, the distance between the ridge and the eaves must be maximum 6 m long, without breakthroughs and without vertical overlaps.
**Novatik METAL CLICK S: For a roof pitch between 8° and 12°, the distance between the ridge and the eaves must be maximum 6 m long, without breakthroughs and without vertical overlaps.

Novatik®

Manufactured by: NOVATIK SRL
HEAD QUARTERS: 9 Mai street, no. 75,
105200 Băicoi, Prahova,România
Tel: +40 244 260 140;
Fax: +40 244 260 145
office@novatik.ro
novatik.ro