

TECHNICAL DATA SHEET


Novatik® | METAL

WOOD

The natural beauty of a wood shingle roof is completely recreated with our newest profile - Novatik METAL Wood - while keeping all the advantages of metal tiles (light weight, high corrosion protection, lasting strength and durability). Unlike traditional wooden shingles, which require maintenance or replacements, Novatik METAL Wood shingles need very low maintenance. Each Novatik METAL Wood tile is made using modern metal pressing technology resulting a deep wood grain impression, which makes the shingle look so unique. The tiles are fixed with nails or screws with a minimum density of 8 units/sqm.

LAYERS

1. Polyester Mat 35 µm;
2. Primer;
3. Layer of ZnMg / Zn;
4. Steel;
5. Layer of ZnMg / Zn;
6. Polyester 10 µm.

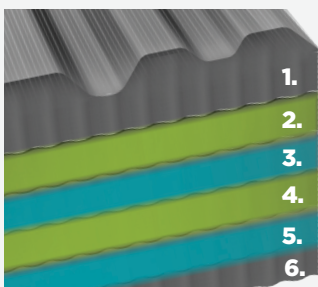

voestalpine
STEEL



Novatik® | METAL
WOOD MAT

TOTAL LENGTH	1 375 mm
LENGTH OF COVER	1 295 mm
WIDTH OF COVER	370 mm
TILES/SQM	2,09 modules
ROOF PITCH	Min. 16°
THICKNESS (STEEL + ORGANIC COATINGS)	0,50 mm
WEIGHT / SQM	4,76 kg/sqm
LOOK	MAT

SURFACE COATING Polyester Mat of **35 microns** on the front side of the tile


PROTECTION LAYER Lack polyester of **10 microns** on the back side of the tile

RAW MATERIAL Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**

UV RESISTANCE RUV 4

CORROSION RESISTANCE RC 3

Novatik® | METAL
WOOD MAT

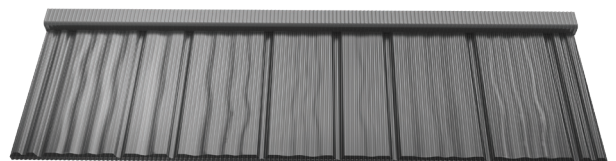

15

YEARS

AESTHETIC
WARRANTY

25

YEARS

TECHNICAL
WARRANTY

COLOURS



Manufactured by: NOVATIK SRL

HEAD QUARTERS: 9 Mai street, no. 75, 105 200 Băicoi, Prahova, România; Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro

novatik.ro